Niky

Line Interactive UPS - Single phase VI

3 100 00

3 100 13

UPS with German standard output sockets

Pack	Cat.Nos	Nominal power (VA)	Active power (W)	Backup time (min)	No. of sockets IEC	No. of German standard sockets	Communic. ports
	3 100 00	600	300	5 to 30	-	1	USB
	3 100 01	800	400	5 to 30	-	1	USB

UPS with German standard output sockets + IEC socket

Cat.Nos	Nominal power (VA)	Active power (W)	Backup time (min)	No. of sockets IEC	No. of German standard sockets	Communic. ports
3 100 09	600	300	5 to 30	1	1	USB
3 100 10	800	400	5 to 30	1	1	USB
3 100 13	1000	600	5 to 30	2	2	RS232
3 100 14	1500	900	5 to 30	2	2	RS232

UPS with IEC multi-socket outlets

Cat.Nos	Nominal power (VA)	Active power (W)	Backup time (min)	No. of sockets IEC	Communic. ports
3 100 02	600	300	5 to 30	3	USB
3 100 03	800	400	5 to 30	3	USB
3 100 04	1000	600	5 to 30	6	USB
3 100 05	1500	900	5 to 30	6	USB

NOTE: The backup times, expressed in minutes, are measured under optimum operating conditions.

Niky

Line Interactive UPS - Single phase VI

Cat.Nos	3 100 00 3 100 02 3 100 09	3 100 01 3 100 03 3 100 10	3 100 04 3 100 13	3 100 05 3 100 14
GENERAL CHARACTERISTICS				
Nominal power (VA)	600	800	1000	1500
Active power (W)	300	400	600	900
Technology	Line interactive VI			
Waveform	Pseudo-sinusoidal			
INPUT CHARACTERISTICS				
Input voltage	230 V			
Input frequency	50-60 Hz			
Input voltage range	160 V-290 V			
OUTPUT CHARACTERISTICS				
Output voltage	230 V ± 10%			
Output frequency (nominal)	50/60 Hz +/-1%			
THD of output voltage	‹ 3% with linear load			
BATTERIES				
Number of batteries	1	1	2	2
Battery range type/ voltage	12 V, 7 Ah	12 V, 9 Ah	12 V, 7 Ah	12 V, 9 Ah
COMMUNICATION AND MANAGEMENT				
Screen and signalling	One button and 2 LEDs for real-time control		One button and 4 LEDs for real-time control	
Telephone protection	RJ 11/RJ 45			
Remote control	Available			
MECHANICAL CHARACTERISTICS				
Dimensions H X W X D (MM)	171x95x349		239x147x354	
Net weight (kg)	7	7.5	13	16
AMBIENT CONDITIONS				
Ambient operating temperature (°C)	0 to 40°C			
Relative humidity (%)	0 to 95%			
Noise at 1 m (dBA)	‹ 40			
CERTIFICATIONS				
Reference product standards	EN 62040-1, EN 62040-2, EN 62040-3			

600-800 VA

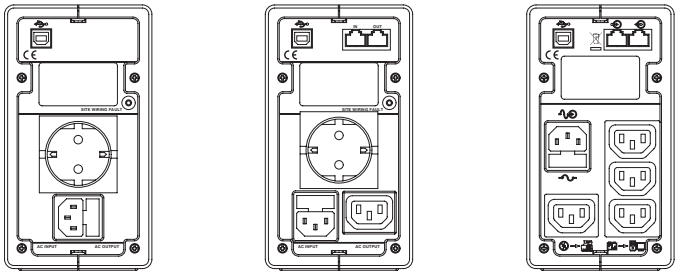

1000-1500 VA